


ProMax Scaffolding

Screw Jack Division

Screw Jack with Flat Plate

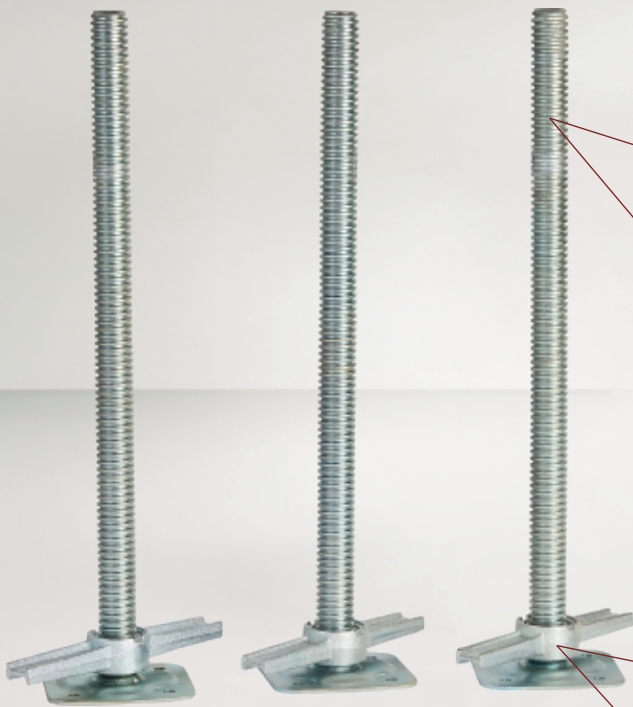

Electro Plated



Hot Dip Galvanized

CSA

Meets CSA Standard

ANSI

Meets Code A10.8

OSHA

Meets 29 CFR Pt.1962

Technical Specs

Weight

N/A lbs | N/A kg

Dimensions

24 in | 61.0 cm & 36 in | 91.4 cm

Thread

Dia. 1.4 in | 3.5 cm, Solid

Finish

Electro Plated, Hot Dip Galvanized