


# ProMax Scaffolding

Frame Division

## Step Frame (125)



**Hot Dip Galvanized**

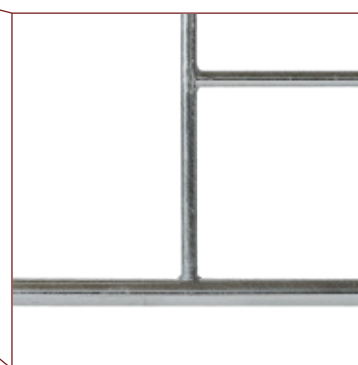

**Powder Coated**

**CSA**

Meets CSA Standard

**ANSI**

Meets Code A10.8

**OSHA**

Meets 29 CFR Pt.1962

### Technical Specs

Weight 30.1 lbs | 13.64 kg

Dimensions 30 x 60 in | 152.4 x 154.9 cm

Lock Spacing 48 in | 121.9 cm

Finish Hot Dip Galvanized, Powder Coated

Lock Style Flip Lock

Lock Options Available

Lock Options Available

[promaxscaffolding.ca](http://promaxscaffolding.ca)

**ProMax**  
ÉCHAFAUDAGES