


ProMax Scaffolding

Frame Division

3x5 Frame (153)



Hot Dip Galvanized

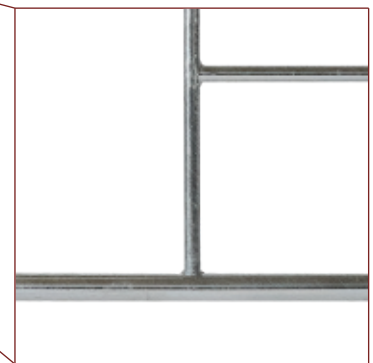

Powder Coated

CSA

Meets CSA Standard

ANSI

Meets Code A10.8

OSHA

Meets 29 CFR Pt.1962

Technical Specs

Weight 70.2 lbs | 31.8 kg

Dimensions 60 x 77 in | 152.4 x 195.6 cm

Lock Spacing 48 in | 121.9 cm

Finish Hot Dip Galvanized, Powder Coated

Lock Style Flip Lock

Lock Options Available

promaxscaffolding.ca

ProMax
ÉCHAFAUDAGES