


ProMax Scaffolding

Frame Division

3x5 Frame (153)



Hot Dip Galvanized

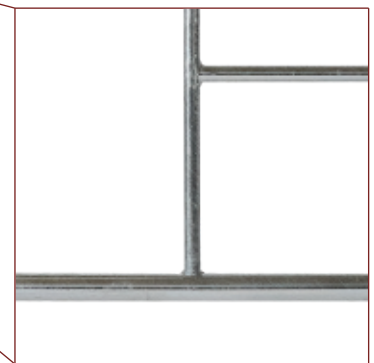

Powder Coated

CSA

Meets CSA Standard

ANSI

Meets Code A10.8

OSHA

Meets 29 CFR Pt.1962

Technical Specs

Weight	31.4 lbs 14.2 kg
Dimensions	60 x 36 in 152.4 x 91.4 cm
Lock Spacing	24 in 61 cm
Finish	Hot Dip Galvanized, Powder Coated
Lock Style	Flip Lock
Lock Options	Available

promaxscaffolding.ca

ProMax
ÉCHAFAUDAGES